


CerAnode™

Technologies International

A World Standard

A Manufacturer of Mixed Metal Oxide Anodes Since 1984

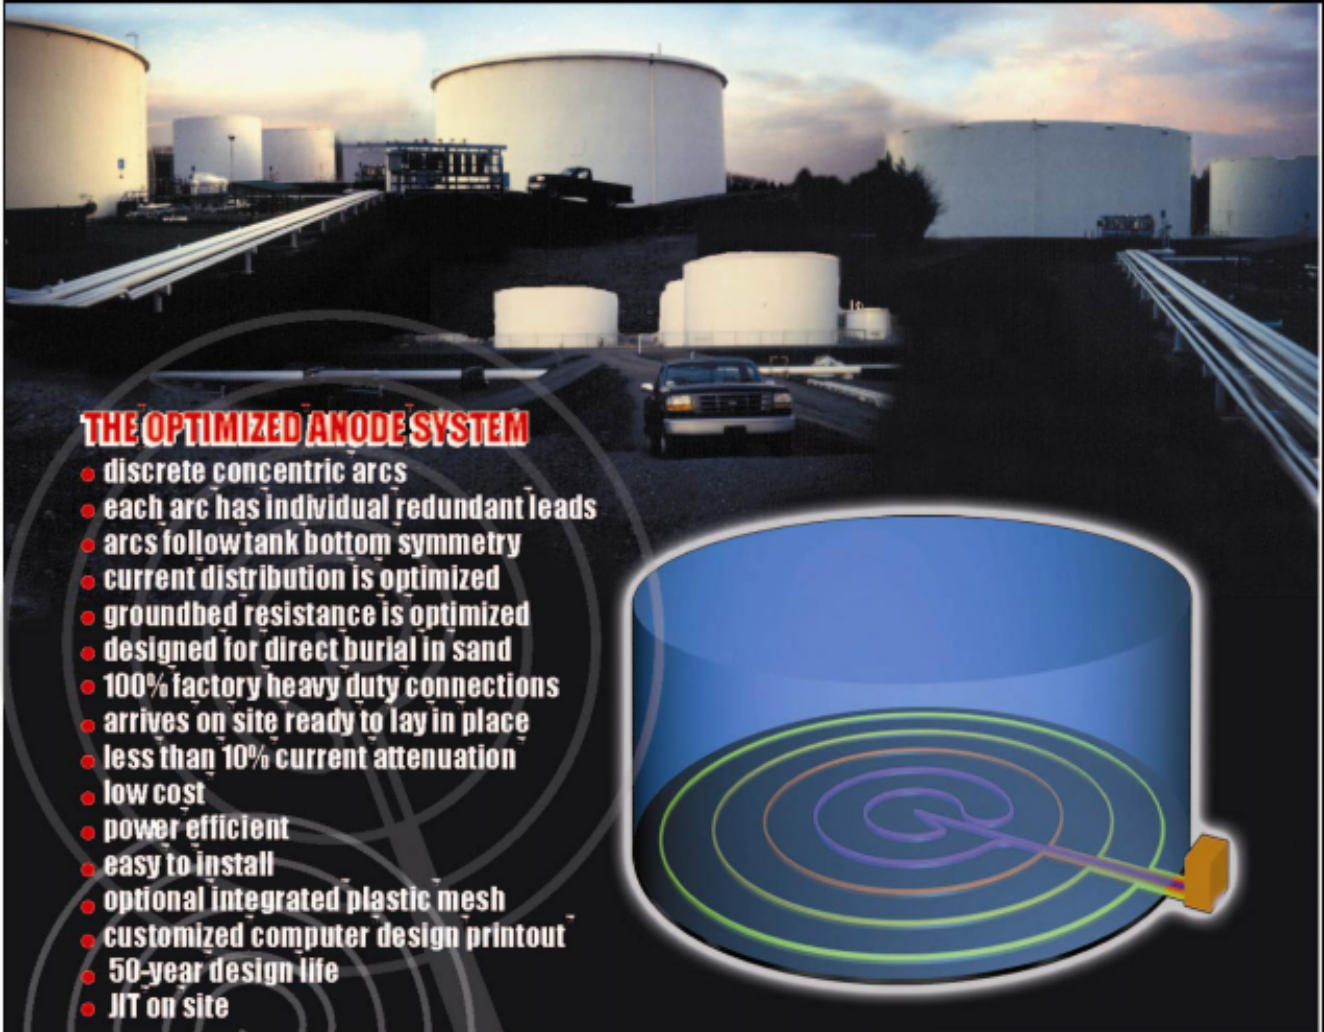

THE OPTIMIZED ANODE SYSTEM

- discrete concentric arcs
- each arc has individual redundant leads
- arcs follow tank bottom symmetry
- current distribution is optimized
- groundbed resistance is optimized
- designed for direct burial in sand
- 100% factory heavy duty connections
- arrives on site ready to lay in place
- less than 10% current attenuation
- low cost
- power efficient
- easy to install
- optional integrated plastic mesh
- customized computer design printout
- 50-year design life
- JIT on site



The CerAnode PiggyBack

Tank Bottom (PBT) Anode System

CerAnode Technologies International 4011 Riverside Drive Dayton, OH 45405 USA
937.278.6547 Telephone 937.278.4352 Fax CerAnode@apsmaterials.com Email


CerAnode Technologies International is a Division of APS Materials, Inc.

PiggyBack™ Tank Bottom Anode

FEATURES


- **Discrete concentric arcs**
- **Each arc has individual redundant leads**
- **Arcs follow tank bottom symmetry**
- **Current distribution is optimized**
- **Groundbed resistance is optimized**
- **Optimized for Tank Annular Plate & Rim Protection**
- **Designed for direct burial in sand**
- **100% factory heavy duty connections**
- **Less than 10% current attenuation**
- **Power Efficient**
- **Easy to Install**
- **Optional integrated plastic mesh**
- **Customized computer design printout**
- **Arrives on site ready to lay in place**
- **Low Cost**
- **50-year design life**
- **JIT (just in time) on site**
- **It makes sense**

CerAnode
Mixed Metal Oxide Anode System
for
Aboveground Storage Tank Bottom
Cathodic Protection

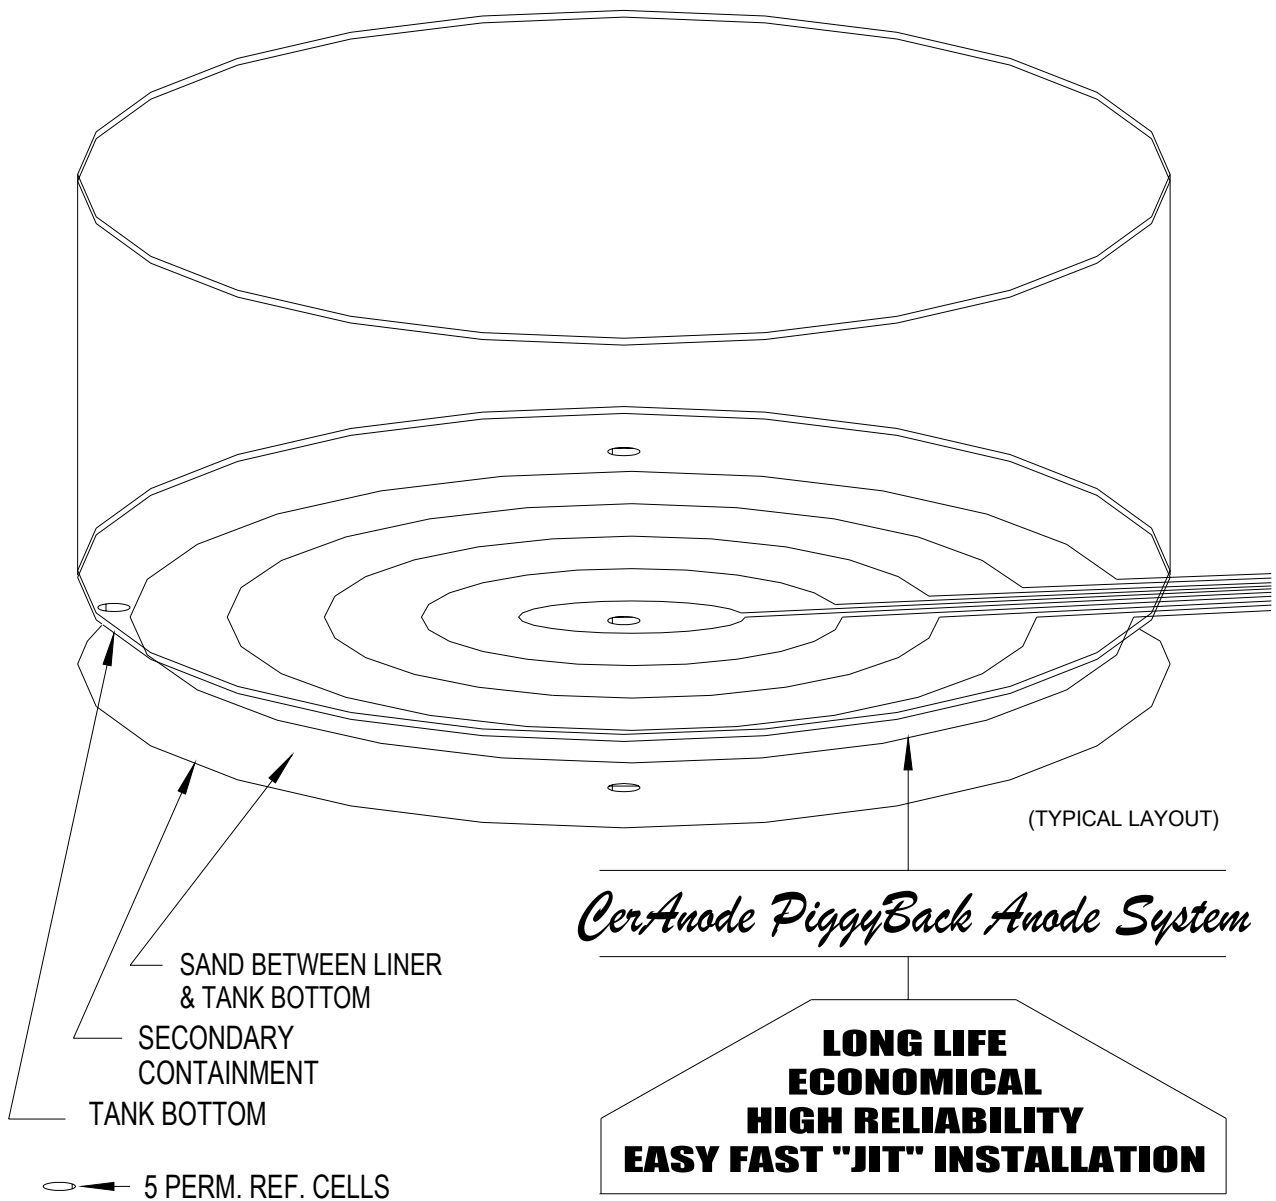

TANK BOTTOMS

The CerAnode PiggyBack Tank Bottom Anode System provides optimized cathodic protection for New Tanks, Existing Tank Bottom Replacement or Double Bottom Applications where space is limited due to a close-proximity plastic secondary-containment liner. In fulfilling its purpose the plastic liner not only isolates the tank bottom from its general environment to prevent the possible leak pollution, but it also isolates the tank bottom electrically from traditional cathodic protection currents. The PiggyBack Anode System, consisting of a series of concentric loops (arcs) in a narrow plane between the tank bottom and plastic liner, is the ideal CP solution. The loops are spaced 2 to 8 feet (normally 5 feet) to provide the desired current distribution and to optimize the anode "throwing power." The factory designed spacing compensates for distance available between the anode and the tank bottom.

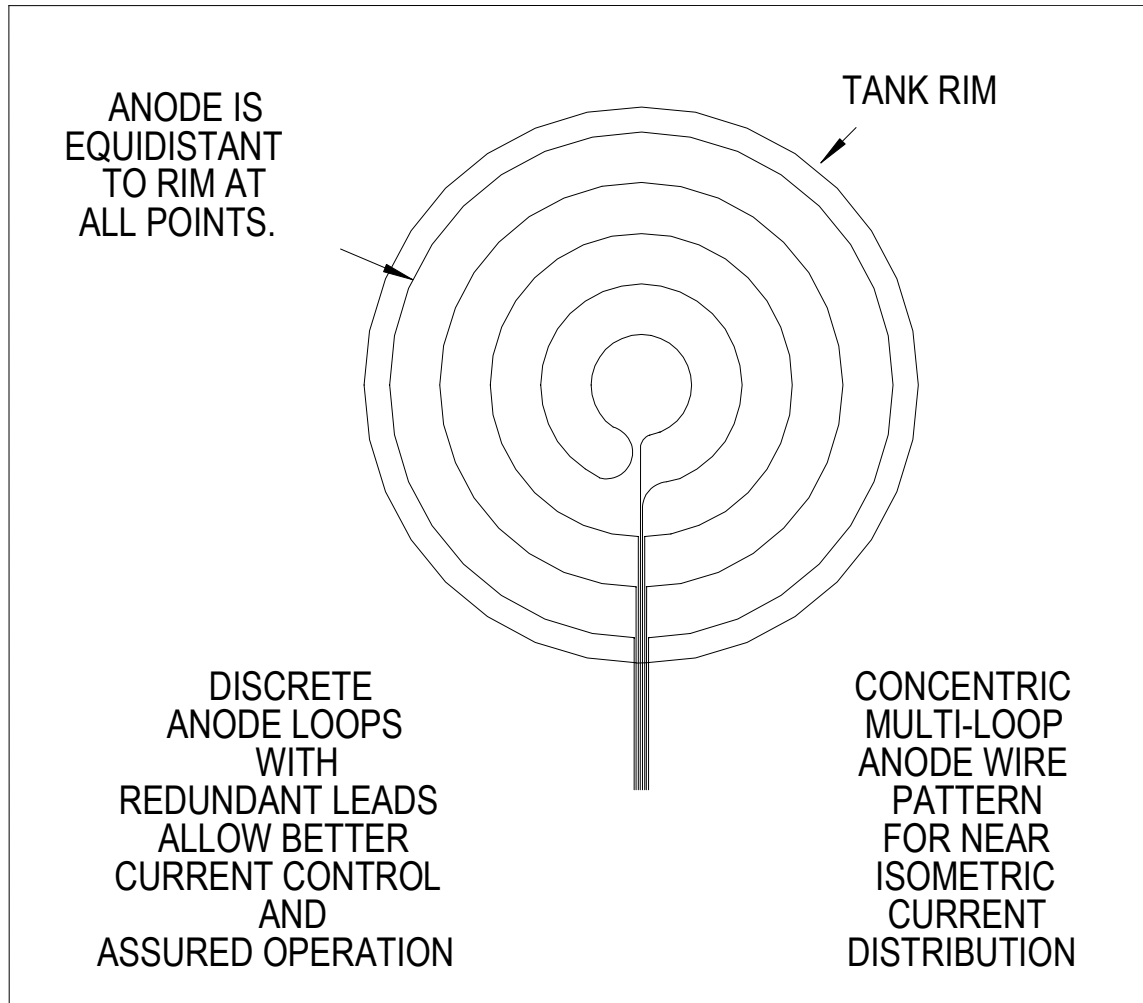


DETAIL OF ANODE LOOP PATTERN UNDER THE TANK BOTTOM

Instead of being closed loops, the two ends of each loop (arc) are brought out to a terminal box providing redundant connections for every loop. Each loop can be operated independently or even electrically disconnected, if the need should ever arise, and the remaining portion of the system will continue to function as normal.

The first loop is concentric with the tank rim and equidistant from the rim. It is spaced at a distance from the rim of no more than half the general loop spacing to make a consistent amount of current available all around the rim where it is most important. Since this under-tank area at the tank rim is most susceptible to corrosion due to its close proximity to the atmospheric elements, this anode

system allows for easy optimization of protection currents in this area by loop spacing adjustment. The anode-to-tank rim symmetry helps to insure optimal current transfer.

Each concentric anode assembly loop consists of an appropriately sized standard high molecular weight (HMWPE) header cable, or other cable choice, with a 1.5 or 3 mm diameter mixed metal oxide (MMO) anode wire mounted PiggyBack the entire length as seen below. The anode wire being continuous around each loop results in significantly more anode length as compared to other systems available. This design also optimizes the length and diameter of anode wire for a given application resulting in extra low groundbed resistance and close to ideal current distribution.

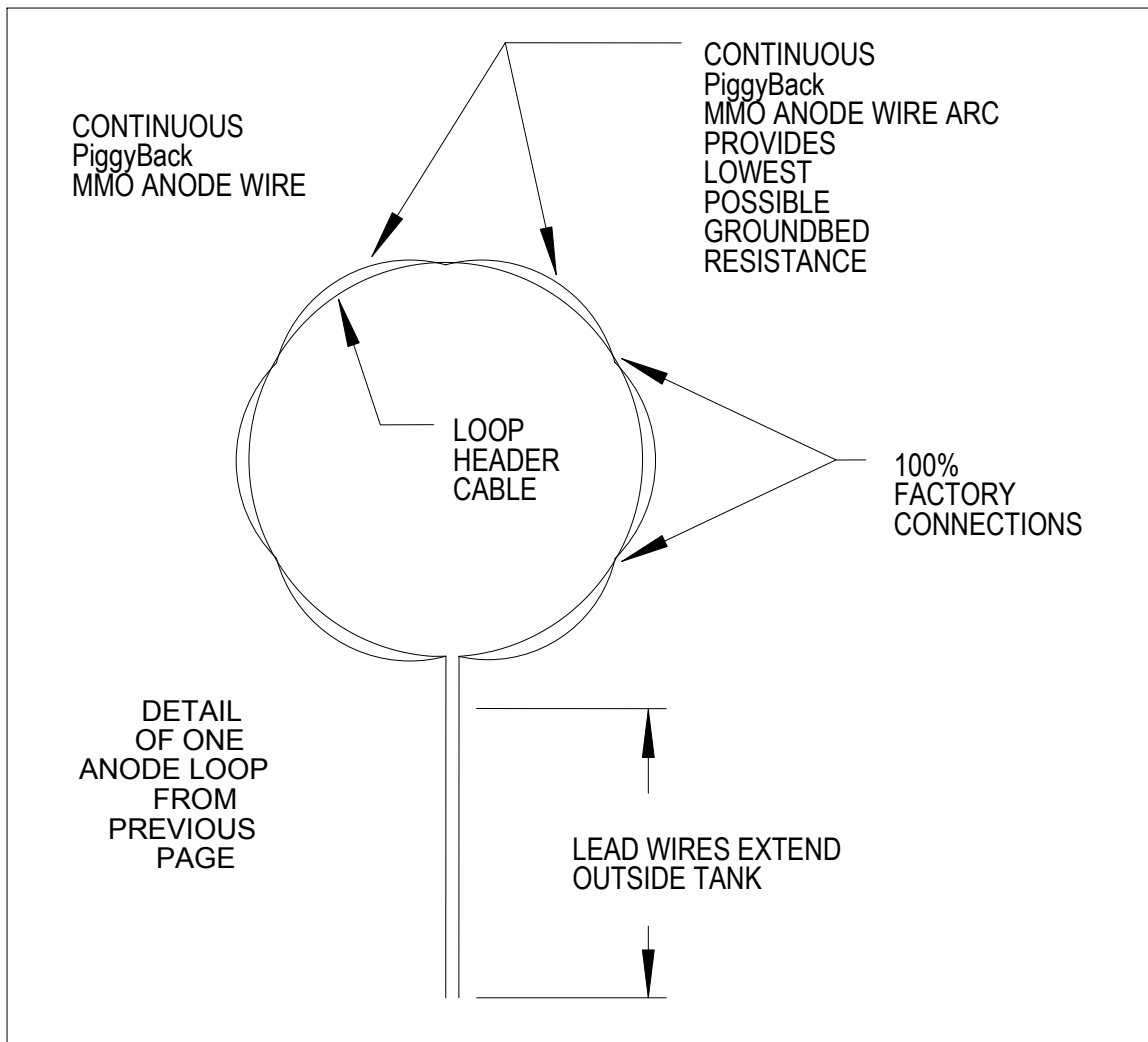


DETAIL OF THE PiggyBack Anode™ LOOP ASSEMBLY

Note that the MMO Anode wire is connected to the header cable at preset intervals around the loop. The spacing of the connection intervals is determined by the mathematical relationship between the wire's electronic resistance, the header cable resistance and the electrolyte resistivity to approximate isometric current distribution from the anode.

In some double bottom applications where the anode will be installed within inches of the tank bottom, the PiggyBack Anode System is available with an integral plastic mesh sleeve around the header-anode wire assembly for added protection against possible anode wire to tank bottom shorts. In all situations the tank construction specification used by the tank contractor should be written with sufficient tutorial to properly educate the tank bottom contractor of the importance of maintaining the anode integrity during construction.

ANODE CONSTRUCTION DETAILS

The type of materials selected to manufacture the anode assembly have withstood the test of time to assure a high level of product confidence. The header cable is standard HMWPE (High Molecular Weight Polyethylene) or Fluoro (fluoropolymer) HMWPE Cathodic Protection Cable as specified. These cables have been recognized as standard in the CP industry for many years. The Anode Wire also has a long and established history. It is made from Commercially Pure Grade 1 Titanium and is activated with mixed metal oxides of iridium, tantalum and titanium. These are among the most corrosion resistant materials known to man. The result is an essentially inert dimensionally stable impressed current anode. Customized MMO activation provides the required current density for the design life of the anode system at the least cost. The all important header cable to anode connection materials also have a well established history.

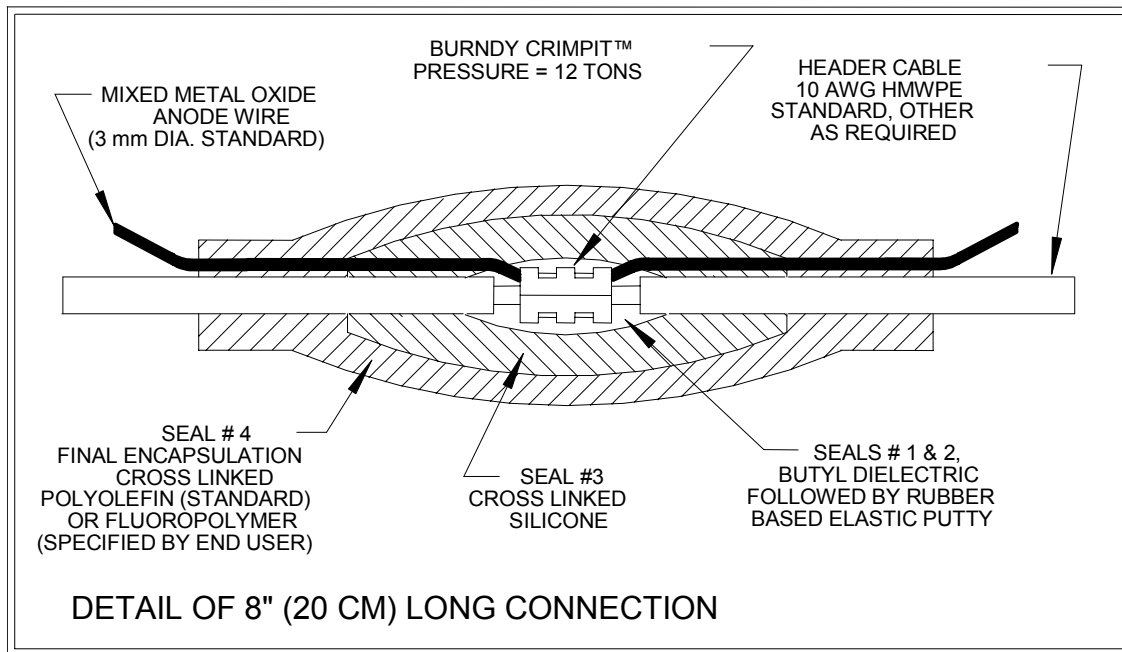

The only connections necessary in the field are at the rectifier terminal box. All header-to-anode connections are manufactured at the factory in a controlled environment. The MMO Anode Wire is electrically connected to the header cable using a standard hydraulic 12 ton crimp to assure a positive low resistance electronic connection. The metallic components of this connection are then isolated from the electrolyte with four distinct seals. These redundant seals are designed and arranged in such a way to assure zero moisture and oxygen penetration into the metallic connection area over the life of the anode material. The connection's encapsulation in combination with the seals also provides the mechanical integrity needed to prevent cable stretching effect or other cable movement from disturbing the connection's isolation from the environment.

A HISTORY OF QUALITY DESIGN AND QUALITY MATERIALS

Providing CP for applications that are difficult or costly to replace if they should ever fail demand a solid CP design and the most reliable materials available. CerAnode has a history of manufacturing QUALITY into its anode products. From the materials used to the all important anode connections, close attention has always been given and always will be given to the construction detail of each anode produced. This is an important moral commitment that also turns out to be profitable. The PiggyBack Anode System used in conjunction with other adjunct materials combine to make one of the most cost efficient and effective anode systems available.

CerAnode 7-Year Anode Warranty

"CerAnode Technologies of APS-Materials, Inc., will give you a new anode if our anode should stop functioning within 7 years when installed and operated according to the anode's specifications and/or instructions." (North America installations only but negotiable in other locations)

---All CerAnode products other than anodes are covered under a 1-year warranty.

No warranty of merchantability nor other warranty, express or implied, is made by Seller except that the seller warrants the goods to be free of defects in workmanship. All information and suggestions appearing in this document or any of the Seller's product literature, quotations or product descriptions is believed to be reliable. However, it is the user's responsibility to determine the suitability of the products for his own use. Since the actual use by others is beyond the Seller's control, no guarantee, expressed or implied other than the warranty statement above, is made by Seller to the effects of such use or the results to be obtained, nor does Seller assume any liability arising out of use of the products by others. Nor is the information in Seller's quotations or product descriptions to be construed as absolutely complete since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. Seller will not be liable for any action or result, claim or loss from same when goods manufactured by the Seller are made in accordance with specifications, drawings or samples supplied by the Buyer. Nothing contained in Seller's quotations or product descriptions is to be construed as permission or as a recommendation to infringe any patent. Since Seller's goods are generic in nature and can be used for many different applications and actual use by others are beyond Sellers control, the Seller will not be liable for any action or result, claim or loss when goods are used for applications where patents may be in effect.

CerAnode Technologies International

Division of

APS-Materials, Inc.
4011 Riverside Dr.
Dayton, OH 45405

Phone 937-278-6547

Fax 937-278-4352

Email - ceranode@apsmaterials.com

Revised 12/04

