

## PIPE & CABLE SHORT LOCATOR

### Model PD-5 Oscillator



- Audio Frequency Oscillator
- External 12v Power or use
- Internal Mark V Ranger battery
- 2 - 100 volts Output (10 steps)
- Pulse "Identifying" Signal
- LED ON-OFF Indicators



Model Mark V Ranger



Complete kit with cables

Distributed by

**AVAILABLE FROM STOCK!**

[www.teststations.com](http://www.teststations.com)

[www.detectron.com](http://www.detectron.com)

[www.tinker-rasor.com](http://www.tinker-rasor.com)

[Info@tinker-rasor.com](mailto:Info@tinker-rasor.com)



An ISO 9001 Registered Company

Tinker & Rasor quality is found in our products, our people and our customer service.



**AUDIO OSCILLATOR**



# TINKER & RASOR

CORROSION MITIGATION INSTRUMENTATION

## PRODUCT DATA SHEET MODEL PD-5 OSCILLATOR

### Features:

- 2 - 100 Volt output
- 10 Position output voltage selector
- Compatible with all "MARK" receivers (Mark II, III, IV, V)
- Pulse "Identifying" signal
- Battery charging circuit built-in
- LED indicators

### Construction:

Made of lightweight materials and designed to snap into the Model Mark V Ranger pipe & cable locator.

### Applications:

- Pipe & Cable locating
- Short locating
- Holiday (Pearson Method) locating

### Environment:

0°C to 50°C (32°F to 122°F)

### Specifications:

12v power supply required.  
Power from Mark V Ranger  
Power using optional rechargeable batteries  
750 c.p.s. signal  
Min Output: 2v  
Max Output: 100v

### Dimensions:

Use -  
5" x 5.5" x 2.5", 1.5 lbs.  
(127mm x 139.7mm x 63.5mm, 0.68 kg)


Shipping -  
13" x 9" x 7", 3 lbs.  
(330mm x 228mm x 177.8mm, 1.36kg)

DELIVERY: **Immediately from STOCK**  
F.O.B. San Gabriel, CA USA

SERVICE: **24-hour Turn-Around**

TERMS: Net30 Days, on approval of credit

WARRANTY: **90 Days**, parts and labor

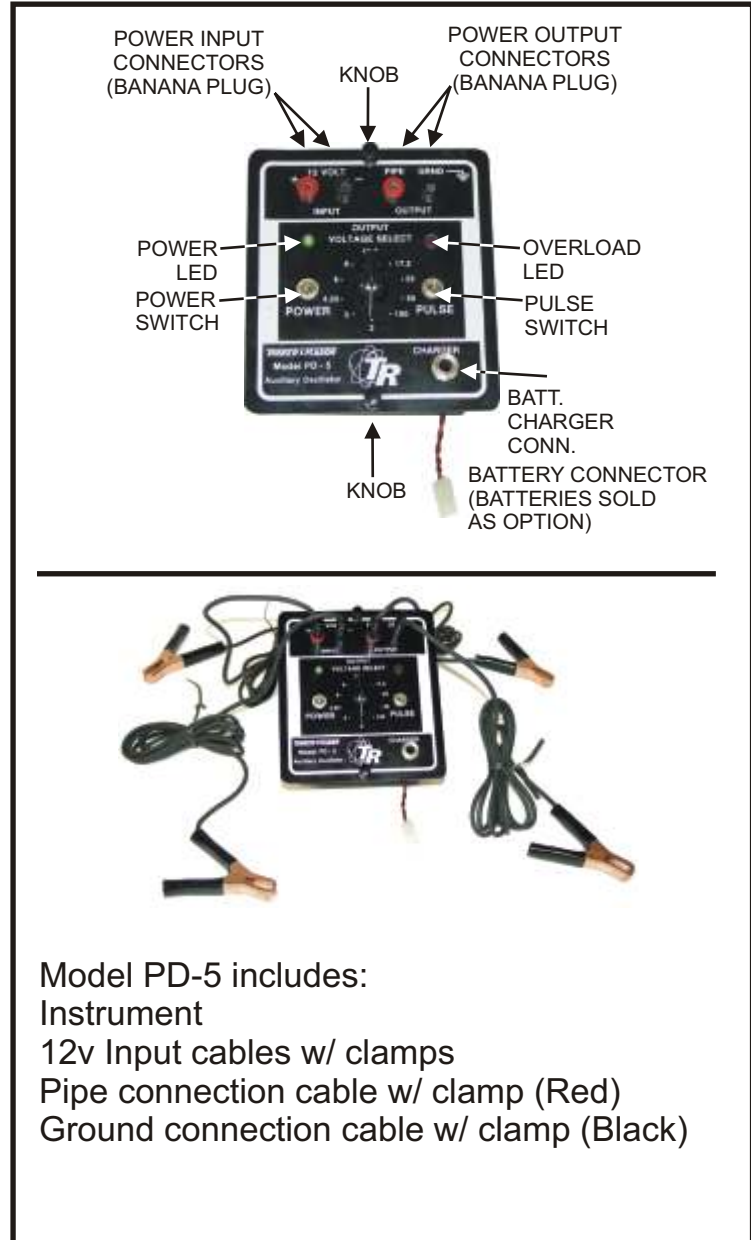

**MODEL PD-5 Audio Oscillator Kit**

**AVAILABLE FROM STOCK**