


Heater Treater Anodes Zinc or Aluminum

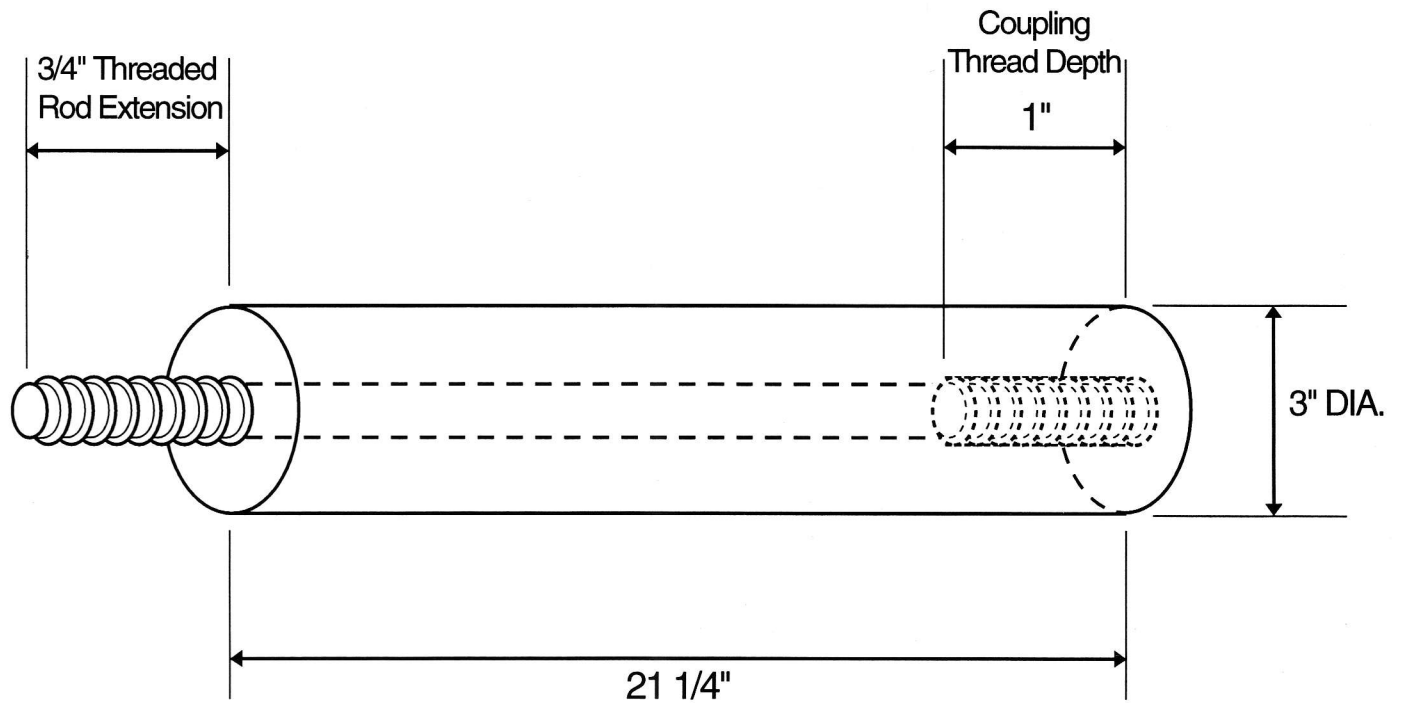

ZINC ALLOY OR ALUMINUM ALLOY

ANODE ALLOY	EFFICIENCY IN AMP-HOURS PER POUND	CONSUMPTION RATE IN POUNDS PER AMP-YEAR	NEGATIVE POTENTIAL TO CUCU SO ₄ REF. CELL
ALUMINUM ALLOY	1150	7.60	-1.15V
ZINC ALLOY	354	24.80	-1.09V

Cores

5/8" NF Threaded Rod
5/8" NF Female Coupling

Aluminum WGT. 13.5 lbs.
Zinc WGT. 35.5 lbs.