



**Reference Electrode for  
Fresh Water, Salt Water &  
Saturated Soil Service**

**Size:** 1" (25 mm) Diameter x 8" (203 mm) long.

**Lead Wire:** 50' (15 m) of #14 (2.5 mm<sup>2</sup>)  
RHH-RHW wire.

**Material:** High Impact ABS, Ceramic with  
Moisture Retention Membrane.


**Stability:** 5 millivolts with 3.0 microamps load.

**Temperature Range:** -10° to 176° F (-23° to 80° C)

SRE-002-CFY - Cu-CuSO<sub>4</sub>

SRE-004-SFB - Ag-AgCl

SRE-006-ZFR - Zn-ZnSO<sub>4</sub>

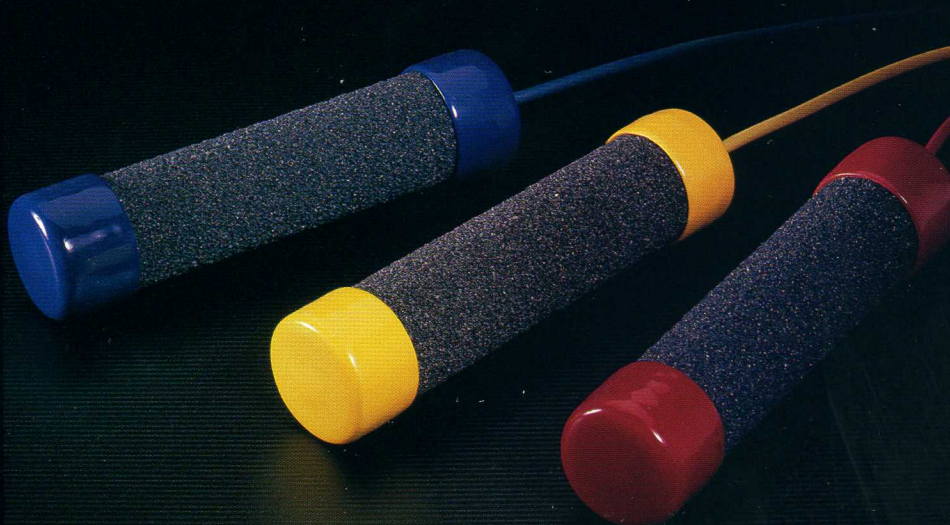

**Reference Electrode for  
Underground & Concrete Service**

**Size:** 1.5" (4 cm) Diameter x 7" (18 cm) long.

**Lead Wire:** 50' (15 m) of #14 (2.5 mm<sup>2</sup>)  
RHH-RHW wire.

**Material:** Ceramic with Moisture Retention Membrane.

**Stability:** 5 millivolts with 3.0 microamps load.

**Temperature Range:** -10° to 176° F (-23° to 80° C)

SRE-007-CUY - Cu-CuSO<sub>4</sub>

SRE-008-SUB - Ag-AgCl

SRE-009-ZUR - Zn-ZnSO<sub>4</sub>

**Electric Mud™ Gelatin Backfill**

EMB-001-Cu

EMB-001-Ag

EMB-001-Zn