


## SOIL RESISTIVITY METER

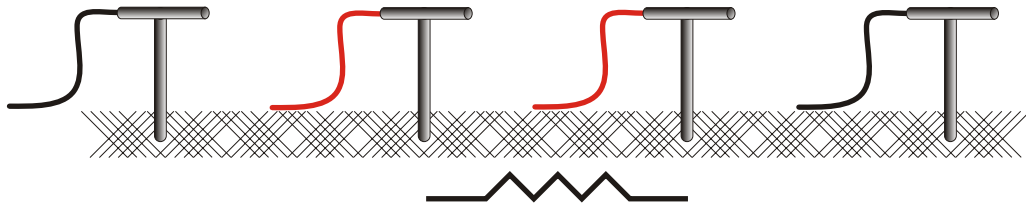

An easy to use Soil Resistivity Meter

Use for:

4 Pin "Wenner Method"

3 Pin "Fall of Potential"

2 Pin applications.

1 Pin "Single Rod"

Range of  $0.01\Omega$  to  $3.3M\Omega$

Features:

Digital meter readout

Push button operation

Weather/Impact resistant case

Easily move between ranges-

.01 Ohm to over 3 MegOhms

Distributed by

Use with the  
T&R Soilbox!



(sold separately)

**AVAILABLE FROM STOCK!**

[www.teststations.com](http://www.teststations.com)

[www.detectron.com](http://www.detectron.com)

[www.tinker-rasor.com](http://www.tinker-rasor.com)

[Info@tinker-rasor.com](mailto:Info@tinker-rasor.com)



An ISO 9001 Registered Company

Tinker & Rasor quality is found in our products, our people and our customer service.





# TINKER & RASOR

CORROSION MITIGATION INSTRUMENTATION

## PRODUCT DATA SHEET

### MODEL SR-2 SOIL RESISTIVITY METER

#### Features:

- Simple Operation
- Up to  $3.3M\Omega$
- Data Logger connection
- Common pin spacing multipliers
- Low battery condition indicator
- Internal rechargeable battery (12v)
- Battery charger included

#### Construction:

Durable Pelican® long- life case with weather sealed lid

#### Applications:

- Wenner 4 Pin Method
- 3 pin "Fall of Potential" Method
- 2-Pin Method
- Geological studies
- Archeological studies
- Soilbox\*

#### Recommendations:

Use to find soil resistivity for a variety of applications, including pipelines, tanks, wells, etc.

#### Environment:

0°C to 50°C (32°F to 122°F)

#### Specifications:

0.01Ω to  $3M\Omega$  Range  
+/-10% Accuracy

#### Dimensions:


10.75" x 10.75" x 6.5"  
(273mm x 273mm x 165mm)

DELIVERY: **Immediately from STOCK**  
F.O.B. San Gabriel, CA USA

SERVICE: **24-hour Turn-Around**

TERMS: Net 30 Days, on approval of credit

WARRANTY: **90 Days**, parts and labor

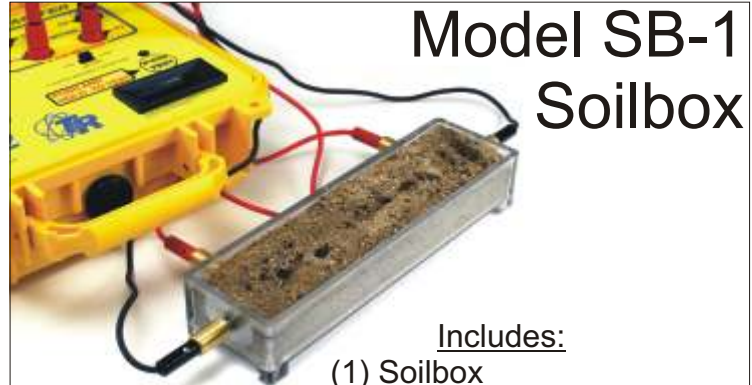

Model SB-1  
Soilbox

#### Includes:

- (1) Soilbox
- (4) Brass connectors
- (2) Banana plug leads, Red
- (2) Banana plug leads, Black

Use in the field or in the lab with the optional Soil Box, Model SB-1.

Model SR-2 has a Pin Selector switch which allows you to choose between 2 Pin or 4 Pin tests without removing cables.

Model SB-1 Soil Box has an easy to figure form factor of 10.

Model SB-1 is made of strong plastic resins allowing for rugged field use. Material is clear for easy visual inspection and cleaning.

Simple push button operation. Turn knob from Ohm to MegOhm range. Display will show reading when in correct range. Multiply reading with pin spacing multiplier for Ohm-cm.



**MODEL SR-2 SOIL RESISTIVITY METER**

**AVAILABLE FROM STOCK**